


DSSP513 Walk-through Metal Detector



Component Details

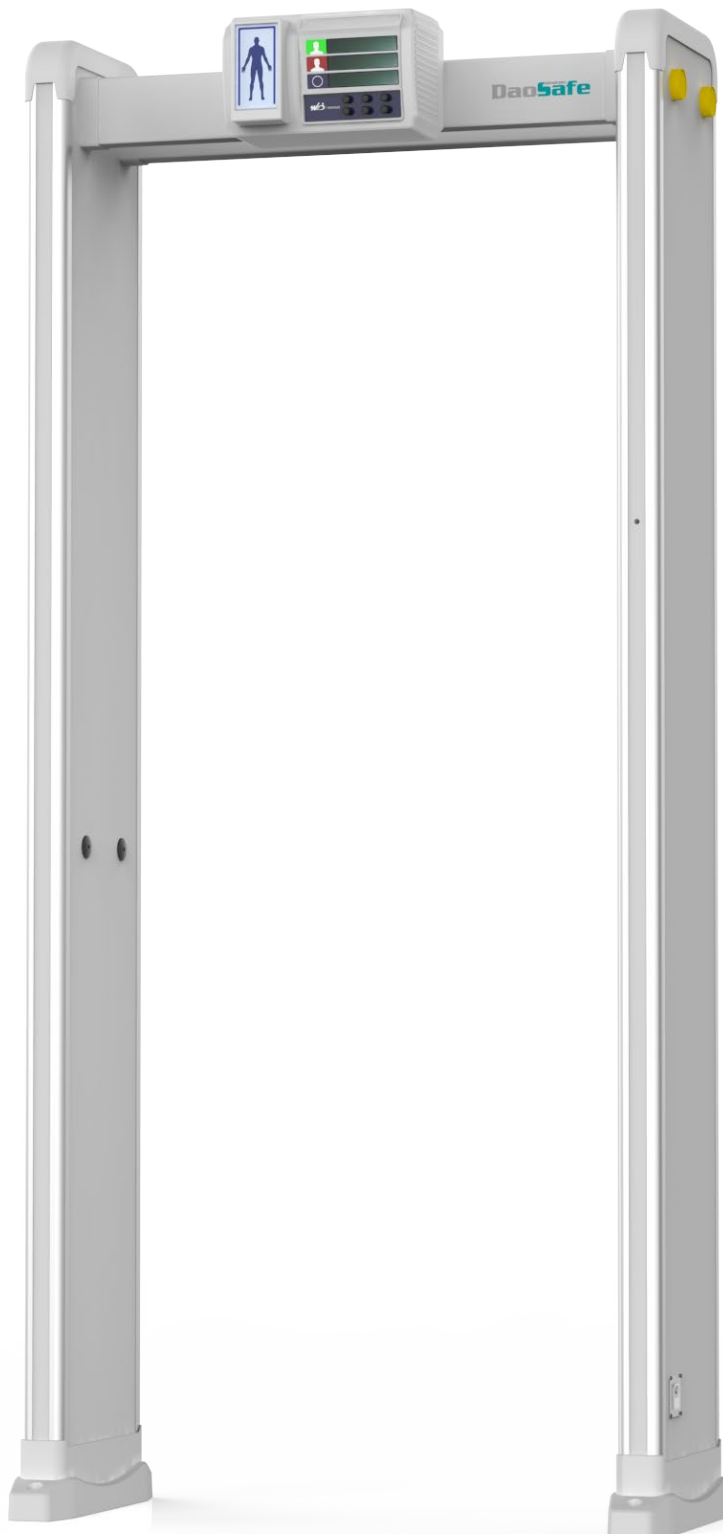

Features


- ◆ The system has the function of displaying environmental monitoring data; High performance, high sensitivity and high stability.
- ◆ With system networking which can manage multiple devices through one PC. (Optional)
- ◆ Preset the weight, volume, size, location, key, jewelry, belt buckle and other false alarms of metal items.
- ◆ Comply with EMC electromagnetic radiation standards, the use of weak magnetic field technology, heart pacemaker wearers, pregnant women, floppy disk, film, videotape and other harmless.
- ◆ Carry metal object can be eliminated function.
- ◆ Products through the European CE certification.

Specifications


Model No.	DSSP513
Brand	Daosafe
Vertical Evening Size	2230 x 920x440mm
Vertical Channel Size	2000x715mm
Net Weight	34kg
Working Voltage	AC90V-240V 50/60Hz
Power	12W
Operation Frequency	1-50 Frequency band
Working Temperature	-20°C~65°C
Installation Environment	Width 100cm* length 200cm (minimum range without metal) sheet transverse
Metal range	Maximum sensitivity > 50g metal

Independent 12-probe Interactive Sector	6 sector (standard) 12/18/33 (optional)
PC Software Operation	Optional
One-button remote Control Operation	Optional
Integrate with Turnstile Gate	Optional
Movable Wheels	Optional

Dimensions

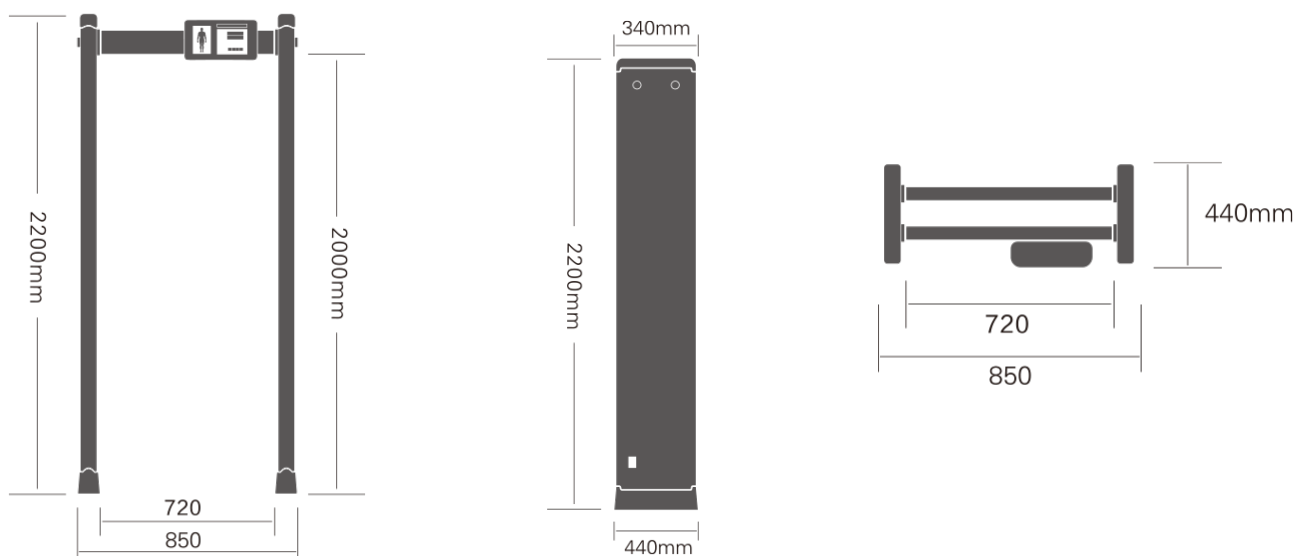

Detecting range

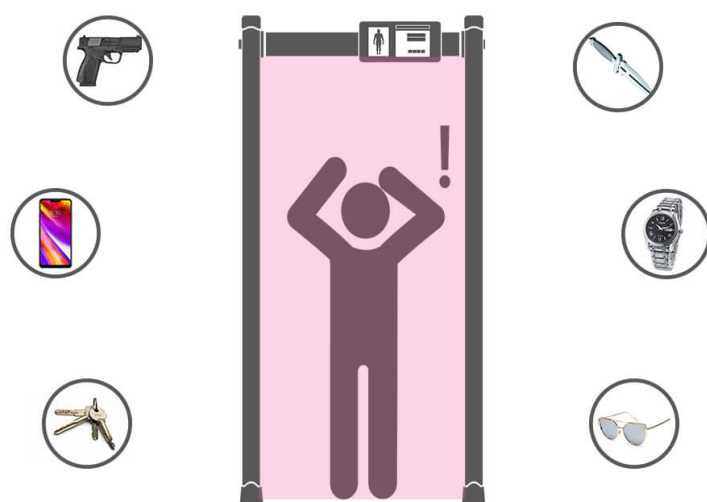

Application range



Functional configuration

Portable metal can be excluding	■
Double sets high brightness red-green digital tube display function	■
Integrated four-button panel operation mode	■
Multi networking interface	■
Pass people statistics function	■
Alarm statistics function	■
Ultra-brightness patch double row regions indicator light	■
50 optional working frequency bands	■
Alarm volume 0-99 adjustable	■
100 alarm sound selection modes	■
Recover factory setting	■
Front bilateral region alarm indicator light	■
The sensitivity of each detection defense zone can be adjusted	■
Each zone sensitivity 0-399 adjustable	■
Safety level 0-99 optional	■
Front and rear single region alarm indicator light	□
72 application scenarios are optional	□
Front and rear four regions alarm indicator light	□
External control warning device port	□
Secondary development port/upgrade port	□
System dual password protection function	□
Multi-location simultaneous detection and alarm function	□
Detection and intelligent distinction of large items	□

Note: “■” means this function is support, “□” means optional.