



Waterproof Anti-fog Anti-hard Light

DS-F851W Dynamic Face Recognition Access Terminal



Megapixel HD
Camera



High Speed
Identification



Accuracy Rate:
99.9%



20,000 Faces
Capacity



Binocular Liveness
Detection



Multiple
Communication
Modes



Local Storage



Multiple People
Simultaneous
Recognition



LINUX System



Wide Dynamic
Strong Light
Suppression

Features


- 5.5-Inch IPS full-view and high-definition display screen (1280x720).
- Two operation modes: Mouse Operation / PC software.
- Multiple people simultaneous recognition, 1: N / 1:1 can identify four people at the same time.
- ≤0.5Ssecond high speed identification,99.9% accuracy rate, wide dynamic 2 Mega pixel HD camera,360-Degree biometrics liveness recognition.
- Built-in card reading module, support Mifare card, CPU card, ID card and so on.
- Two USB communication port, can insert USB disk to import data, can use USB disk to upgrade and backup data.
- Metal body, Waterproof &Smog-Proof, sturdy and durable.

Specifications

Model No.	DS-F851W
Brand	Daosafe
Body Material	Metal Body
Size	565x100x155mm
Weight	1.8KG
Display Screen	5.5-Inch IPS Full View HD Screen
CPU	4 CoreA7 1.2GHZ
Storage Capacity	1GB DDR3 + 8GB EMMC
GPU	MAL400 II
Communication Way	WIFI Communication Can Be Optional
Operation System	LINUX
Camera	Wide Dynamic Binocular 2 Million HD Camera
Liveness Detection	Support
User Capacity	20,000 Faces + 20,000 Cards+20,000 Passwords
Records	200,000 Records
Recognition Way	1:N / 1:1
Identification Speed	≤0.5s
Wiegand Function	One Group of Wiegand Input / Wiegand Output (26/34)
Working Voltage	DC12V/2A (DC9V-14V)
Working Temperature	-10℃ to 70℃
Working Humidity	10%-90% RH



Configuration

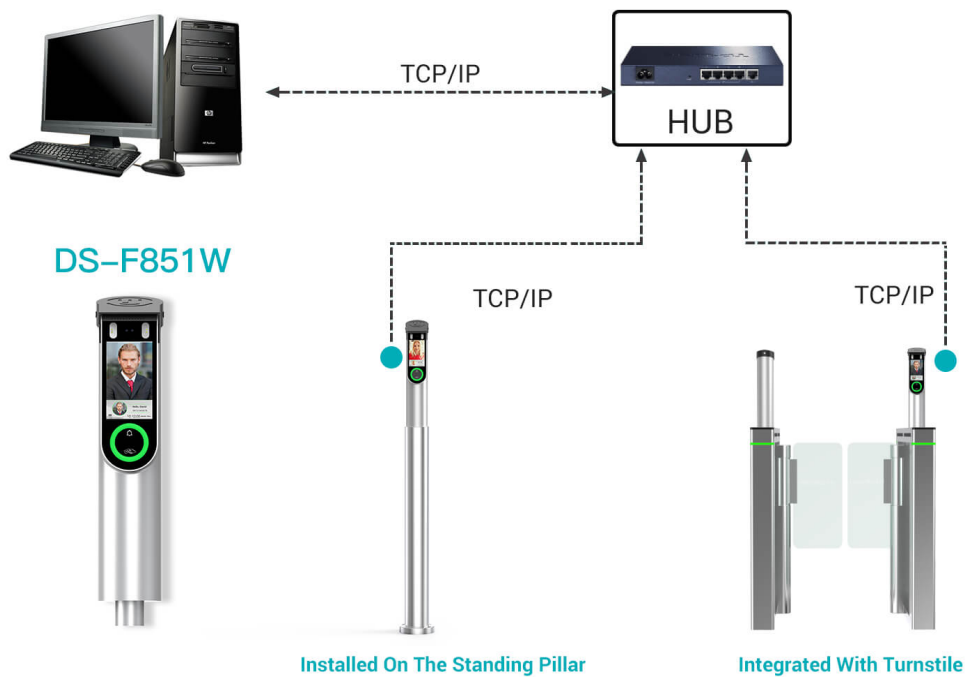

Dynamic Face Recognition Access Controller

20,000 Faces, 200,000 Records, 5.5-Inch IPS Full-View, HD Display

Screen, High Speed Identification.