

Description

- > Optical flap turnstile is to control pedestrian entry or exit in restricted areas, usually used in high pedestrian traffic flow in both directions.
- The body is made of brushed stainless steel which is robust, rigid, anti-rust, waterproof and durable.
- > It is ideal for both indoor and outdoor settings.
- It has standard relay signal, which can be integrated with any kind of third-party access control system (e.g.: RFID, Fingerprint and Biometric reader device).
- It supports any type of external device solution. (e.g.: Display, Counter, Reader, Face recognition, Push button, Card collector, RFID Wristband Collector, Coin insert, Barcode/QR reader, Wheel).
- In case of emergency, the flap arms will open automatically to allow free passage when power off.
- > It support standard and handicapped type with wide passageway, wheelchair, and pedestrian with large luggage can pass.
- It is suitable for areas with general pedestrian traffic (e.g.: Hotel, Gym, Building, Bank, Shopping mall, Reception Area).

Features

- Long-life performance, high operation dependability and fast response.
- ✓ The whole system runs smoothly, low noise, no mechanical impact.
- ✓ Single directional or Bi-directional is selectable.
- Automatic reset function: swing arms will lock automatically within 5s (can be setting) if passenger delay to entry.
- When power is off, swing arms will open automatically, which is complying with fire safety requirements.
- ✓ LED indicator (red × means no entry; green → means entry).
- ✓ Infrared sensor alarm function, in case of illegal intrusion and reverse intrusion.
- Anti-intrusion function, the speed gate is locked automatically until valid opening signal input.
- Anti-reverse function, the turnstile alarms if someone wants to entry in the reverse direction.
- ✓ Anti-trailing function, the speed gate alarms if someone wants to burst in without permission.
- It has the fastest open and close speed rate and can be adjusted.
- ✓ Easy to install and maintain.
- ✓ 3-year warranty support.



We don't only offer turnstile gates


We offer full access control solutions





Specification

Model No.	DS3000
Type	Optical Flap Turnstile Gate
Brand	Daosafe
Framework Material	304 Stainless Steel+ Plexiglas Arm
Arm material	Plexiglas-transparency
Dimension	1400 * 280/450 * 1000mm
Net Weight	70kg/pcs –120kg/pcs
Passage Width	550mm(standard), 850mm(handicap)
Passing Direction	Single directional / Bi-directional
MCBF	5 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	−20 °C − 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor (shelter)
Flow Rate	40-45 people per minute
LED Indicator	LED indicators on top: green \rightarrow entry. red \times no entry
Infrared Sensor	4 pairs(standard)
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485


Standard









Standard +Handicap









Face Recognition

Dynamic face recognizes, non-contact and trendy solutions

Barcode /QR scanner

Connect with mini PC or access controller to use Support phone or paper Barcode/QR

RFID Card

All kinds of RFID card reader, such as

Mifare, EM cards, HID card, Key Fob, Wristband...

Biometric Device

Support Fingerprint, RFID card, password

Popular and secure access control solutions

Key Fob

RFID type, mainly use in apartment

Card Collector Machine

The solution is mainly used in park, building for visitor

Wristband

RFID type, mainly used in swing pool and gym

Coin Insert

The solution is mainly for bus stations or toilet

Wheel

Integrated on turnstile for movable and portable

Button

Exit by freely passing/ push button

3rd Party Access Controller

Any 3rd party access controller can integrate with all our turnstiles




Flap Turnstile DS3000 passage width can reach to 550-850mm, also support flexibly match up DS2000 Swing Turnstile Gate reach to 550-1200mm, which is suitable for handicapped person or pedestrians with luggage.

The turnstile is usually used in high-grade occasion.



System Integration Figure

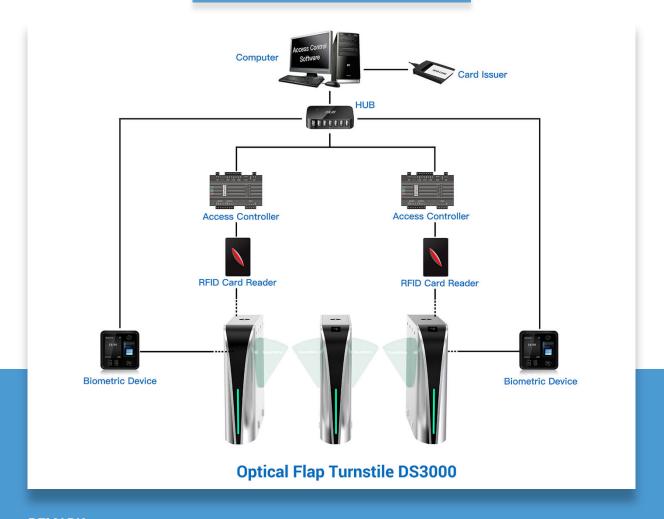

REMARK:

- The turnstile circuit board support to work with any relay signal, and support to integrated with any 3rd party access control system: RFID, BIOMETRIC, QR/BARCODE and so on.
- Multiple access controller board can be connected by TCP/IP through network cable, control by central computer.
- The turnstile circuit board is also with RS232 output, it can connect with mini PC. Turnstile will open once received simple code by computer, which is suitable for the complicated like ticketing system solution.

The most special feature of flap turnstile is faster open and close speed than other turnstile gates, normally 40-45 persons per minute. So it's perfect for the sites with big visitors flow rate.







One Lane Two Lanes Three Lanes

Daosafe Technology Co., Ltd. TEL: +86 755 21017409 EMAIL: info@daosafe.com WEB: http://www.daosafe.com