



## Model DS408

### Full Height Turnstile with Wheelchair Gate

DS408 Full height turnstile the most obvious feature is that the turnstile with bicycle gate for pedestrian and wheelchair access. Which is provides a high safety and convenient access solution for both pedestrian and disabled.

It supports 900mm for wheelchair access, and supports 660mm standard gate for pedestrian access.

## Features

- Two way or one way working.
- Support 900mm for wheelchair, 660mm for pedestrian.
- The movement with absorber structure, making the product operate very quietly and runs smoothly.
- Lock structure: security can control both entry and exit, for example, in case of power failure, people can exit but cannot enter unless authorized by security.
- Green and red LED indicator display passing status.
- Outdoor/indoor use
- Fire safety requirements, arms open automatically.
- Easy to install and maintain.
- 3 years warranty support.

## Customized service


- Appearance color can be customized based on installation environment.
- Material optional.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- Picture: high resolution and scene picture can be customized



Logo Custom



LED Light

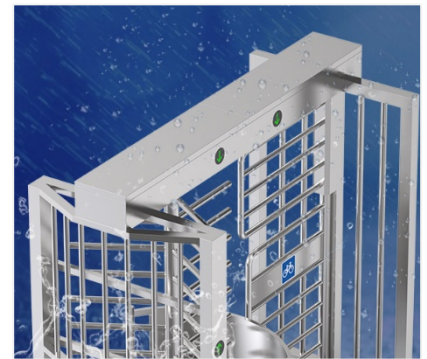

Waterproof



Manually Control Entry Direction



660mm For Pedestrian, 900mm For Wheelchair

## Access Control System

Daosafe turnstile gates can be well integrated with any 3<sup>rd</sup> party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein





## Specifications

Model No.	DS408
Type	Full Height Turnstile with Wheelchair Gate
Brand	Daosafe
Framework Material	304 full stainless steel
Arm Support	120° rotors with 3 sections
Dimension	2450 * 1260 * 2300mm
Net Weight	380kg/pcs
Passage Width	2 lanes: 660mm/lane (for pedestrian) 900mm/lane (for wheelchair)
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-15 °C – 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	30 people per minute
LED Indicator	Two LED indicators on top: green → entry, red x no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Automatic arm open when power off
Flexibility	Integrate with any access control



## Dimensions

Front View

Side View

Top View

