



Model DS7200

Speed Gate

DS7200 speed gate is an elegant and slim solution for access control, swing arm are Plexiglass with dazzling LED light which are more attractive and impressive.

It supports 600mm standard and 900-1200mm handicapped type for wide passageway, wheelchair, and pedestrian with large luggage can also pass, suitable for areas with general pedestrian traffic (e.g.: Hotel, Gym, Building, Bank, Shopping mall, Reception area).

Features

- Two way or one way working.
- Support integrated with any type of access control systems.
- Quick opening times (0.6s-1s depending on swing size and material)
- Passage width can be extended to 1200mm, height can be extended to 1800mm.
- Indoor/outdoor use(shelter).
- Low noise, system runs smoothly.
- Green and red LED indicator display passing status.
- Fire safety requirements, arms open automatically.
- Easy to install and maintain.
- 3 years warranty support.

Customized Service


- Appearance color can be customized based on installation environment.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- Arm glass width and height are optional.
- Infrared sensor number optional.
- Picture: high resolution and scene picture can be customized.

Functions

- **Infrared sensor alarm function:**
in case of illegal intrusion and reverse intrusion.
- **Anti-intrusion function:**
the gate is locked automatically until valid opening signal input.
- **Anti-reverse function:**
the turnstile alarms if someone wants to entry in the reverse direction.
- **Anti-trailing function:**
the speed gate alarms if someone wants to burst in without permission.
- **Anti-collision and anti-kick function:**
it designed with consolidated and more durable mechanism, will not break even someone collide it.
- **Mechanism self-protection:**
the arm will reset automatically if off position. The movement will not be broken or damaged even hit.




Logo Custom

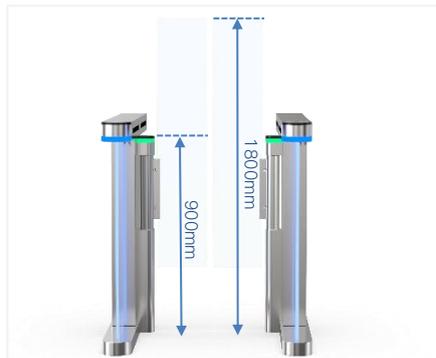


High Arm Optional



Wide Lane Optional

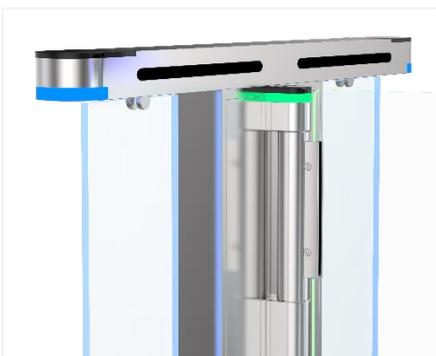

Dazzling LED Light

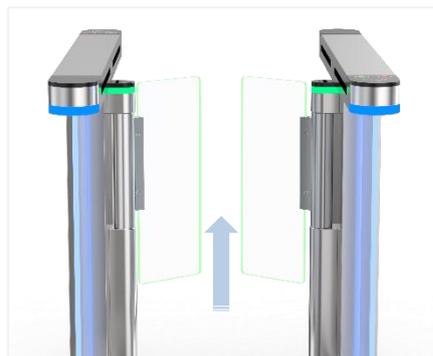

Fire Safety Requirements,
Arms Open Automatically



Anti-trailing Function

Access Control System

Daosafe turnstile gates can be well integrated with any 3rd party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint




Face



Palm Vein


Three lanes with handicapped lane for card solution installed at office building

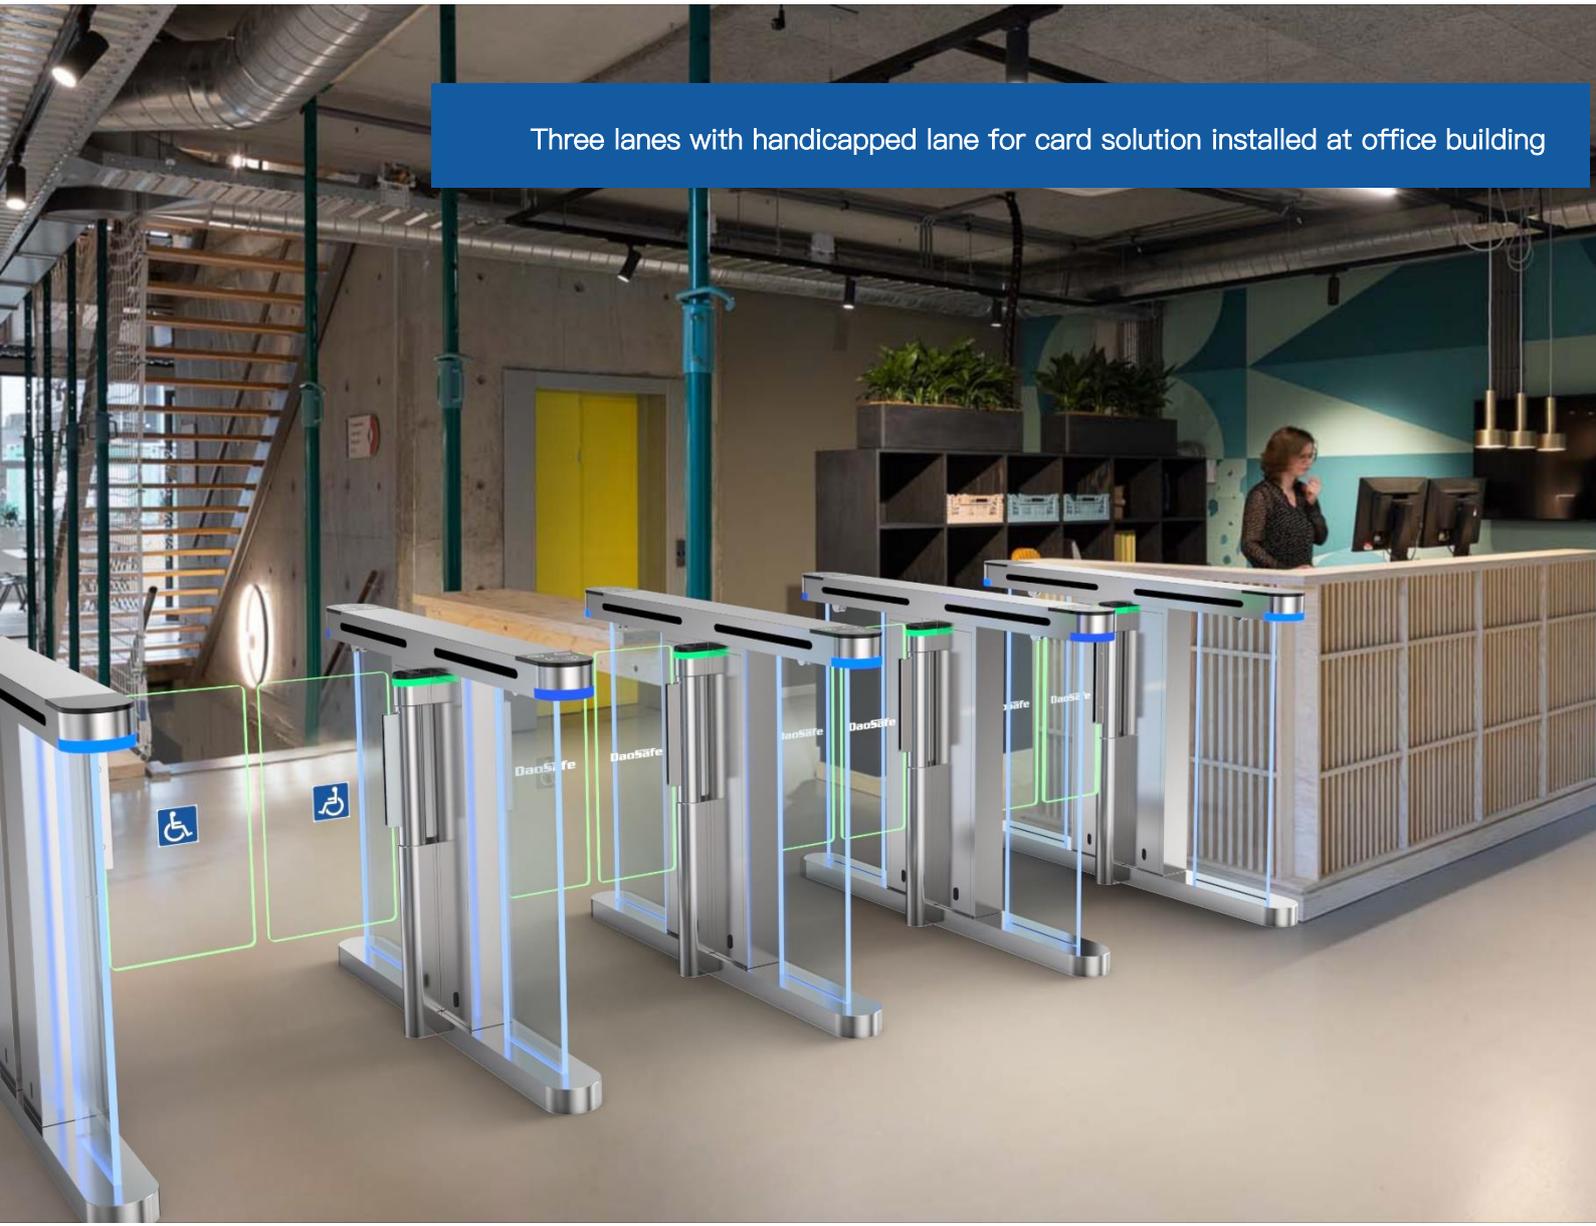


Specifications

Model No.	DS7200
Type	Speed Gate
Brand	Daosafe
Framework Material	304 Stainless steel+ plexiglass arm
Arm material	Plexiglass–transparency
Dimension	1200 * 200 * 1000mm
Net Weight	80kg/pcs (single core), 100kg/pcs (double core)
Passage Width	600mm (standard), 900–1200mm (handicapped)
Arm Height	900mm (standard), 1800mm max. (optional)
Passing Direction	Single directional / Bi-directional
MCBF	15 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-15 °C – 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Waterproof Level	IP54
Working Environment	Indoor / Outdoor (shelter)
Flow Rate	45 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Infrared Sensor	6 pairs (4 pairs on top + 2 pairs on below)
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485
Flexibility	Integrate with any access control


Dimensions

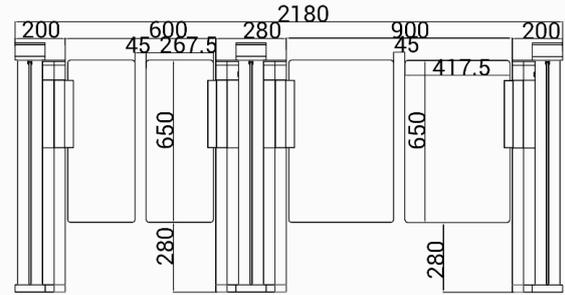

Front View



Side View

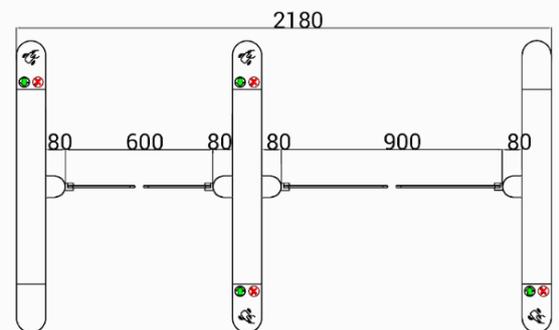

Top View

