



Model DS1000S

Tripod Turnstile (Twin type)

DS1000S is a tripod turnstile with twin rotate arms, one cabinet with two 550mm passageways to improve traffic efficiency. Only one person can pass at one time, highest security to prevent the illegal trailing.

The biggest feature of this product is its wide body of 520mm, which can integrate any size of third-party door equipment. For example, ESD, LCD, and other devices. And because of its width, it is heavy and sturdy, making the product very secure.

Features


- Two way or one way working.
- Support integrated with any type of access control systems.
- Lower power consumption.
- Low noise, system runs smoothly.
- Green and red LED indicator display passing status.
- IP65 waterproof level, indoor/outdoor use.
- Fire safety requirements, arms drop down automatically.
- Easy to install and maintain.
- 3 years warranty support.



2 Arms Drop Down



LED Indicator

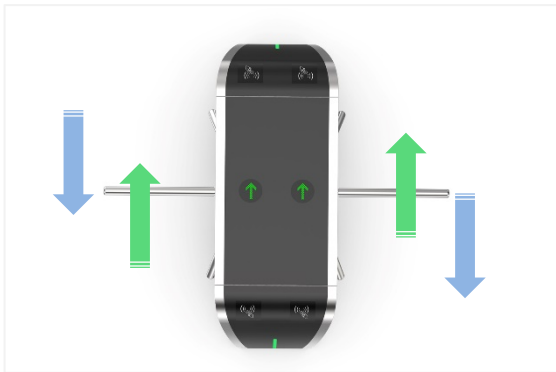

Single/Bi-directional Selectable



Anti-trailing Function:
one person can pass at one time

Customized Service

- Appearance color can be customized based on installation environment.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- Picture: high resolution and scene picture can be customized




Arc Shape Cabinet

Access Control System

Daosafe turnstile gates can be well integrated with any 3rd party access control systems



Card Solution

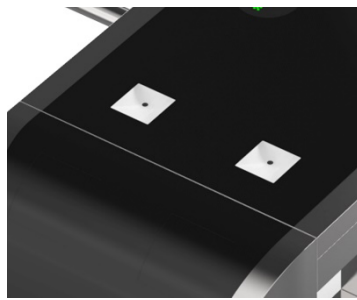

QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face




Palm Vein




Specifications

Model No.	DS1000S
Type	Tripod Turnstile
Brand	Daosafe
Framework Material	304 stainless steel + black titanium
Arm material	304 stainless steel
Dimension	1400 * 520 * 1000mm
Net Weight	110kg/pcs
Passage Width	550mm + 550mm
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-20 °C – 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	35+35 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Arms will drop down automatically
Flexibility	Integrate with any access control

Side View

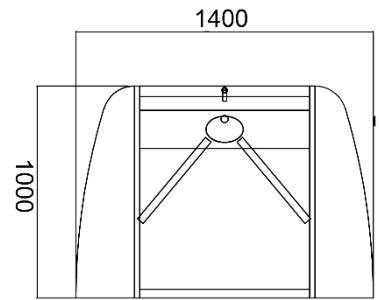

Front View

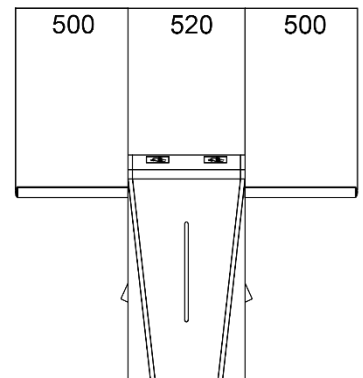

Top View

